






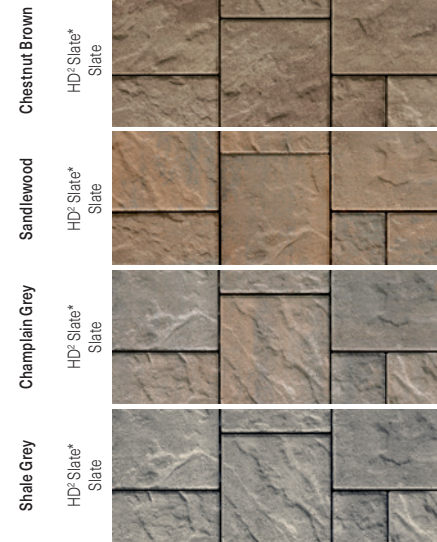

# BLU 80 mm

DESCRIPTION: Paver TEXTURE: Slate and HD<sup>2</sup> Slate




Specifications per pallet		Imperial	Metric
<b>A</b>		Product dimension (L×W×H) <b>A</b> 6 ½ × 13 × 3 ½	165 × 330 × 80
		Product dimension (L×W×H) <b>B</b> 13 × 13 × 3 ½	330 × 330 × 80
		Product dimension (L×W×H) <b>C</b> 19 ½ × 13 × 3 ½	495 × 330 × 80
<b>B</b>		Cubing	84.96 ft <sup>2</sup>
		Approx. Weight	3 246 lbs
		Number of rows	8
<b>C</b>		Coverage per row	10.62 ft <sup>2</sup>
		Lin. coverage per row	9.75 lin. ft

## Pallet Overview



## Laying Patterns Options

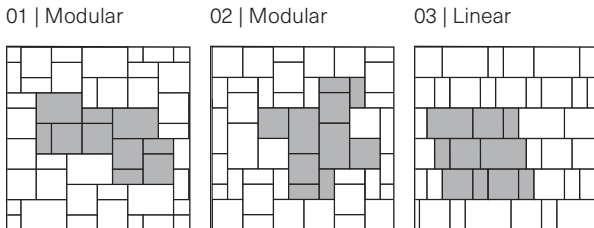

Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.

## NOTES

See page 6 for icons description.

See page 19 for more information about applications.

See page 56 to 58 for more technical information. When used in a permeable pavement application, see page 93 to 97 for more technical information.

\*HD<sup>2</sup> Slate is only available in USA.

**JOINT WIDTH:** ½" (7 mm)  
**% OF SURFACE OPENING:** 4.5%\*\*  
**INFILTRATION RATE:** 570 in./hr (14 475 mm/hr)

\*\*For permeable application, the installation should be combined with Blu 6 × 13 in a modular pattern. A min. of 4.5% opening surface requires 75% of Blu 6 × 13 and 25% of Blu.