




BLU 80 mm




DESCRIPTION: Paver TEXTURE: Smooth and HD² Smooth

Pallet Overview




HD² Smooth Smooth Chestnut Brown
 HD² Smooth Smooth Champlain Grey
 HD² Smooth Smooth Caffè crema
 Smooth Beige Cream
 HD² Smooth Smooth Greyed Nickel
 HD² Smooth Smooth Shale Grey
 HD² Smooth Onyx Black

Specifications per pallet

	Imperial	Metric
A  Product dimension (L x W x H) A	6 1/2 x 13 x 3 1/8	165 x 330 x 80
32 units / pallet		
B  Product dimension (L x W x H) B	13 x 13 x 3 1/8	330 x 330 x 80
32 units / pallet		
C  Product dimension (L x W x H) C	19 1/2 x 13 x 3 1/8	495 x 330 x 80
16 units / pallet		
Cubing	84.96 ft²	7.90 m²
Approx. Weight Smooth	3 095 lbs	1 404 kg
Approx. Weight HD² Smooth	3 280 lbs	1 488 kg
Number of rows	8	
Coverage per row	10.62 ft²	0.99 m²
Lin. coverage per row	9.75 lin. ft	2.97 lin. m

Laying Patterns Options

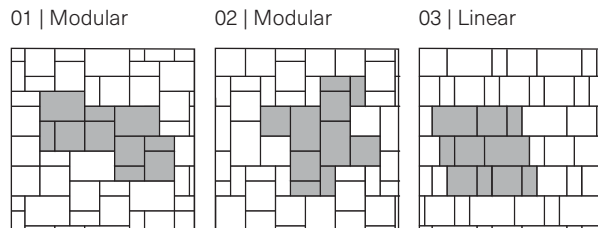

Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.

NOTES

See page 6 for icons description.

See page 19 for more information about applications.

See page 56 to 58 for more technical information. When used in a permeable pavement application, see page 93 to 97 for more technical information.

JOINT WIDTH: 3/32" (7 mm)
% OF SURFACE OPENING: 4.5%**
INFILTRATION RATE: 570 in./hr (14 475 mm/hr)

**For permeable application, the installation should be combined with Blu 6 x 13 in a modular pattern. A min. of 4.5% opening surface requires 75% of Blu 6 x 13 and 25% of Blu.