







MISTA Random

DESCRIPTION: Paver TEXTURE: Multi-textured

Specifications per pallet	Imperial	Metric
A  Product dimension (L x W x H) A	3 15/16 x 7 7/8 x 2 9/16	100 x 200 x 65
80 units / pallet	Product dimension (L x W x H) B	7 7/8 x 7 7/8 x 2 9/16
B  Product dimension (L x W x H) C	11 13/16 x 7 7/8 x 2 9/16	300 x 200 x 65
100 units / pallet	Cubing	116.20 ft ²
C  Approx. Weight	3 356 lbs	1 522 kg
90 units / pallet	Number of rows	10
Coverage per row	11.62 ft ²	1.08 m ²
Lin. coverage per row	17.71 lin. ft	5.40 lin. m

Pallet Overview



Chestnut Brown Multi-textured
 Sandalwood Multi-textured
 Champlain Grey Multi-textured
 Shale Grey Multi-textured




Laying Patterns Options

04 | Modular

05 | Modular

06 | Linear

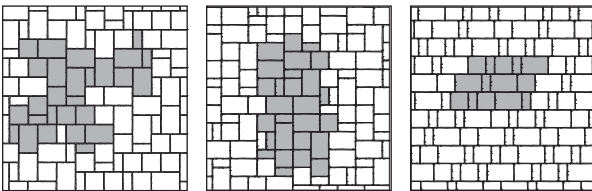

Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.

NOTES

See page 6 for icons description.

See page 19 for more information about applications.

See page 56 to 58 for more technical information. When used in a permeable pavement application, see page 93 to 97 for more technical information.

JOINT WIDTH: 3/16" to 9/16" (4 to 14 mm)

% OF SURFACE OPENING: 6.3 %

INFILTRATION RATE: 610 in./hr (15 505 mm/hr)

Permeable pavers allow for storm water drainage and manage excess runoff. The use of permeable pavers also facilitates LEED® certification easier to obtain.