






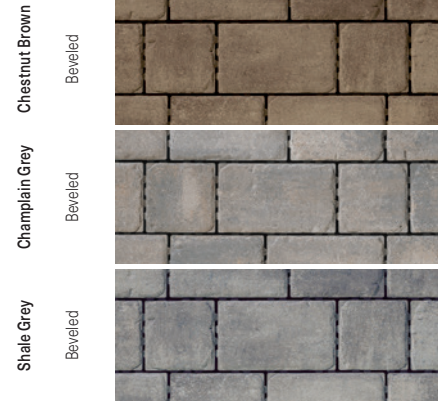

PURE

DESCRIPTION: Paver TEXTURE: Beveled



Specifications per pallet	Imperial	Metric
A  Product dimension (L×W×H) A	9 × 9 × 3 1/8	229 × 229 × 80
40 units / pallet	Product dimension (L×W×H) B	12 × 9 × 3 1/8
B  Cubing	90 ft ²	8.36 m ²
40 units / pallet	Approx. Weight	3 175 lbs
C  Coverage per row	11.25 ft ²	1.05 m ²
40 units / pallet	Lin. coverage per row	15 lin. ft
	Number of rows	8

Pallet Overview




Laying Patterns Options

01 | Linear

02 | Herringbone

02 | Modified Herringbone

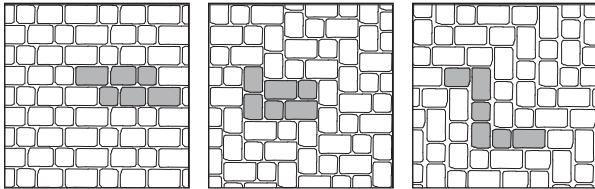

Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.

NOTES

See page 6 for icons description.

See page 56 to 58 for more technical information. When used in a permeable pavement application, see page 93 to 97 for more technical information.

See page 19 for more information about applications.

JOINT WIDTH: 3/8" (10 mm)
% OF SURFACE OPENING: 5.0 %
INFILTRATION RATE: 726 in./hr (18 440 mm/hr)

The use of permeable pavement systems throughout the world has proven effective in reducing storm water runoff while increasing infiltration rates as it returns the water to the environment. The use of permeable pavers also facilitates LEED® certification easier to obtain.